


Stealth oil free CS6

Type: **oil free traditional piston pump**
 Transmission type: **direct**
 Starting type: **direct drive**
 Range of power: **13÷19,5 Hp - 10÷15 kW**
 Range of pressure: **up to 10 Bar**
 Dew point (with membrane dryer): **-20 °C**
 (with adsorption dryer): **-40 °C**

Oil residual (ISO 8573-1): **class 1**
 F.A.D. (ISO 2017 annex C): **780÷1350 L/min**
 Noise level: **max 78 L_{wa}(dB)**
 Motor efficiency: **IE2**
 Duty cycle: **S3 100%**

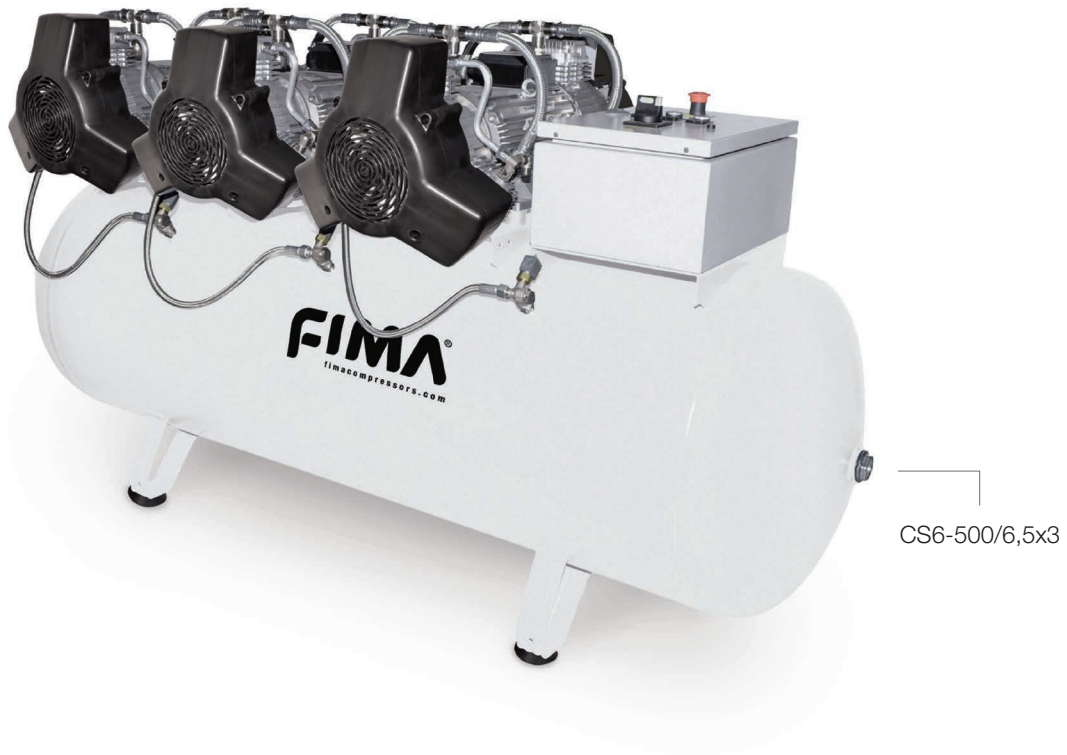

CS6-500/6,5x3

Stealth CS6 13÷19,5x3 Hp 10 Bar

Oil free compressors

Model	Pump Head	Tank	Air Displacement		Free Air Delivery*		Power Supply	Nominal Power		Revolutions	Max Pressure		Noise Level	Dimensions	Weight
STEALTH	type	Lt.	L/min	CFM	L/min	CFM	V/Hz	HP	kW	Rpm	Bar	Psi	L _{wa} (dB)	mm	Kg
CS6-270/6,5x2	CS6	270	1440	50,4	900	31,8	400/50	6,5x2	5x2	1450	10	145	75	1560 x 1000 x 1030	220
CS6-270/6,5x2E	CS6	270	1440	50,4	780	27,6	400/50	6,5x2	5x2	1450	10	145	75	1560 x 1000 x 1030	240
CS6-500/6,5x3	CS6	500	2160	75,6	1350	47,7	400/50	6,5x3	5x3	1450	10	145	78	1980 x 780 x 1050	330

*L/min at 5 Bar / CFM at 70 Psi
 E = equipped with membrane dryer

Dimension: Length x Depth x Height